Universal Motion Components

Quality Irrigation Products



UMC is a ISO 9001:2015 Certified Company



www.umcproducts.com

2920 Airway Ave, Costa Mesa, Ca. 92626 phone: 714.437.9600 fax: 714.437.9700



Features and Benefits

The Standard UMC Power Saver 3.5 center drive features a high efficiency helical gear reduction and industry leading irrigation duty motors that offer long life and quiet operation. It is available in 6 different gear ratios with 3 motor options.

- ▶ 95% efficient helical gear reduction
- Heat treated steel gears
- 6 gear ratio options (20:1, 25:1, 30:1, 40:1, 50:1 and 60:1)
- Available with three 3-phase motor options CSA, CE, CCC and SASO certified motors IP 45 rated
- ▶ Aluminum finned stator for superior heat dissipation
- Motor drain holes protected by UMC's exclusive Spray Guard™ for superior spray protection
- Internally vented junction box protects motor lead connections from moisture

Center Drive Gear Motor

Power Saver 3.5

The most dependable center drive in the industry


The Standard UMC Power Saver 3.5 center drive is designed for use on center pivots and lateral / linear irrigation systems. It has been the center drive of choice for decades on systems around the world and is field proven to be tough and dependable.

Part Number	Output RPM
06168-101G	14 / 11 RPM
06168-101Q	29 / 24 RPM
06168-101H	35 / 29 RPM
06168-101A	44 / 35 RPM
06168-101B	57 / 47 RPM
06168-101F	67 / 55 RPM
06168-101D	86 / 70 RPM

- Magnet wire to motor lead connections covered with Teflon tubing and encapsulated with P.D. caps for superior moisture protection
- Class H wire and Class F insulation
- ► Thermally protected motor with automatic reset located in the junction box
- Multi-bolt mounting pattern fits (3 3/8" x 6 3/8"), (4 3/4" x 7 1/4") and (5" x 6") bolt patterns
- Dual input and output seals reduce oil leaks
- ► Top oil fill plug positioned to set the correct oil level
- Integrated crop guard for coupler shields to nest and protect oil seals from crop wrapping and debris
- Seals savers on output to protect oil seals

sales@umcproducts.com

Universal Motion Components

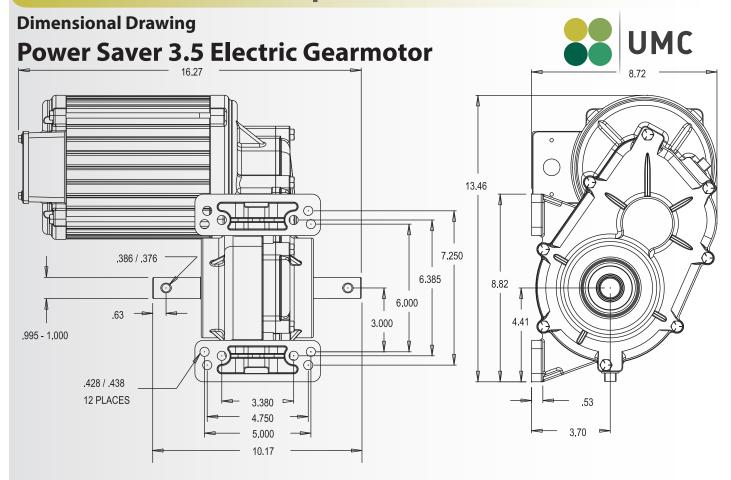

Part Number	Gear	Motor	Service	Volts AC	Frequency	Output RPM	Full Load AMP
	Ratio	HP	Factor				
06168-101G	60:1	0.60HP	1.0	460 / 380	60 / 50 Hz	14 / 11 RPM	1.6 / 1.7 A
06168-101Q	60:1	0.75HP	1.3	460 / 415 / 380	60 / 50 / 50 Hz	29 / 24 RPM	1.4 / 1.4 / 1.5 A
06168-101H	50:1	0.75HP	1.3	460 / 415 / 380	60 / 50 / 50 Hz	35 / 29 RPM	1.4 / 1.4 / 1.5 A
06168-101A	40:1	0.75HP	1.3	460 / 415 / 380	60 / 50 / 50 Hz	44 / 35 RPM	1.4 / 1.4 / 1.5 A
06168-101B	30:1	1.50HP	1.0	460 / 415 / 380	60 / 50 / 50 Hz	57 / 47 RPM	2.4 / 2.7 / 2.7 A
06168-101F	25:1	1.50HP	1.0	460 / 415 / 380	60 / 50 / 50 Hz	67 / 55 RPM	2.4 / 2.7 / 2.7 A
06168-101D	20:1	1.50HP	1.0	460 / 415 / 380	60 / 50 / 50 Hz	86 / 70 RPM	2.4 / 2.7 / 2.7 A





sales@umcproducts.com

Universal Motion Components, Co. Inc. 2920 Airway Ave, Costa Mesa, Ca. 92626 Phone - 714-437-9600 Fax - 714-437-9700 Web - http://www.umcproducts.com E-mail - sales@umcproducts.com